

SEAFLO

CATALOGUE

MARINE PRODUCTS 2026



**Accessories Spares
Centre (Pty) Ltd**

Suppliers of Alternative Parts and Accessories to the Motor, Hardware and Marine Trade.

CONTENTS AT A GLANCE

CONTENTS

PAGE

Portable Toilets	3
Marine Toilets	4
Waterproof Storage Cans	5
Pressurized Accumulator Tank	6
Marine Macerator Pump 01 Series	6
Water Pressure System 51 Series	6
DC Diaphragm Pump	7
Washdown Pump Kits	7
Portable Washdown Pump Kit	8
Outdoor Camping Shower	8
Bilge Pump Float Switch	9
600Gph Seaflo Bilge Pump	9
Non-Automatic Bilge Pumps 01 Series	10
Non-Automatic Bilge Pumps 13A Series	11
Automatic Bilge Pumps 17 Series	12
Low Profile Automatic Bilge Pumps	13
Automatic Bilge Pump	14
3800Gph General Purpose Pump	14
Submersible And Inline Pump	15
Submersible Pumps	15
Portable Live Bait Kit 10 Series	16
Portable Livewell Aerator Kit	16
Livewell/Baitwell Pumps 5 Series	17
Livewell/Baitwell Pumps 13C Series	17
1600Gph Dual Port Livewell Pump	18

CONTENTS

PAGE

Gear Oil Lube Pump	18
Manual Diaphragm Hand Pump	19
Fuel Transfer Pump	19
In-Line Bilge Blower Fan	20
Round Louver Air Vent	20
All-Round Pole Lights	21
Mini LED Navigation Lights	22
Square LED Navigation Light	23
LED Bi-Color Bow Navigation Light	24
LED Deck Mount Navigation Lights	24
LED Deck Light	25
LED Livewell Light	25
Remote Control Led Searchlight	25
LED Oblong Courtesy Light	26
LED Ceiling Light	26
Covered Battery Cutoff Switch With Key	26
Plastic Handle	26
Flush Latch	27
Flush Pull Slam Latch	27
Flush Latch Locking	27
Fold-Up Adjustable Drink Holder	28
Bait/Fillet Table	28
Nylon Cleats	28
Stainless Steels Cleat	29

PORTABLE TOILETS

SEAFLO

A S C Accessories Spares
Centre (Pty) Ltd



SFPT-10-01

10L



Flushing water tank
13L (3.43 Gallon)
Waste tank
10L (2.64 Gallon)
Dimension (L*W*H) mm
404*353*313





SFPT-20-01

20L



Flushing water tank
13L (3.43 Gallon)
Waste tank
20L (5.28 Gallon)
Dimension (L*W*H) mm
404*353*392

- Ideal for Marine, RV and camping.
- Completely self contained.
- Sealed valve keeps odors in the tank.
- Ergonomic carrying handle.
- Rotating pour-out spout makes emptying easier.
- Durable ABS molded plastic(PP, PA, HDPE).
- Light weight and durable
- Compact design for easy storage and transportation
- Large, comfortable seat, simple to use, easy to maintain
- No external water or power connections required
- Easy to carry, easy to clean

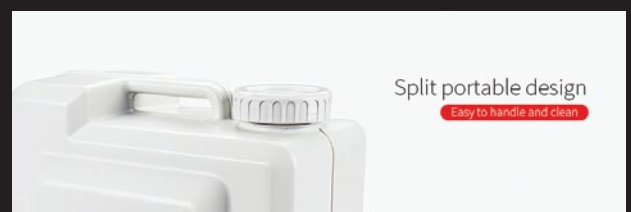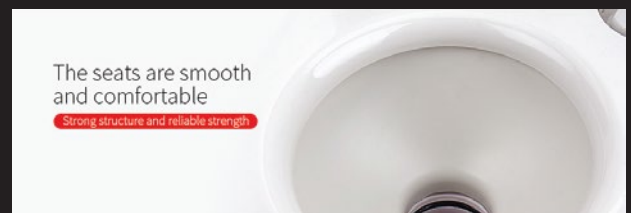

The SEAFLO portable toilet is intended for mobile use, such as camping, boating, caravans, cabins, medical, children, home, emergencies, etc. It has high quality construction and makes it strong and durable. Its lightweight design makes it easy to transport and be placed anywhere. Light weight and durable. Compact design for easy storage and transportation. Large, comfortable seat, simple to use, easy to maintain. No external water or power connections required.

MARINE TOILETS

SEAFLO

A S C Accessories Spares
Centre (Pty) Ltd

SFMTE1-01-R



Soft Close Seat

SFMTM-01-R



Soft Close Seat

MODEL	TYPE	CONTROL	SIZE	DIAMETER	MATERIAL	DIMENSIONS	MAX DRAW
SFMTE1-01-R	Electric	Switch Panel	Regular	3/4" Inlet 1" Discharge	Ceramic bowl	492*355*360 mm	20A @12V 10A @24V
SFMTM-01-R	Manual	Twist 'n' Lock	Regular	3/4" Inlet 1-1/2" Discharge	Ceramic bowl	482*463*334 mm	

SFPTE1-01-R

- Convenient push-button flush
- Easy-to-clean ceramic bowl
- Flexible impeller flush pump
- Permanent magnet type motor, fully enclosed, with stainless steel shaft
- Built-in back flow preventer
- All corrosion resistant material for marine use
- Soft close seat

A dual-function pump eliminates the need for hand pumps and dry-bowl valves. With the push of a button, the self-priming flush pump rinses the bowl as the Macerator and high-capacity scavenger pump grind up waste and pump it out. Includes a heavy-duty push button and 1" to 1 1/2" discharge hose adapter. Easy-to-clean china bowl.

SFPTM-01-R

- Baked enamel seat & cover in compact or regular size
- Twist "n" Lock handle eliminates leaks
- Right or left pump Assembly
- Self-priming pump for above or below waterlines
- Crevice free contours and smooth mouldings
- Automatic vacuum breaker for easier pumping
- Soft close seat

SEAFLO manually operated marine toilet designed for comfort, convenience and worry-free days on the water, this head features a residential-like china bowl and an ergonomic handle that makes it easy to flush. The powerful nozzle flush system provides robust full bowl coverage. A compact footprint enables this head to fit in tight locations and the free-standing manual pump easily adapts for right or left handed installation.

WATERPROOF STORAGE CANS



MODEL	VOLUME	SIZE (L*W*H)	LID MATERIAL	BARREL MATERIAL
WT01-05	5L	215*178*209mm	PP	PE
WT01-10	10L	215*178*360mm	PP	PE
WT01-20	20L	285*351*329mm	PP	PE
WT01-30	30L	285*351*429mm	PP	PE

Meets the needs of family members of all ages. Waterproof sealing level up to IPX6 can withstand strong water jets (100Ltr/min). Can be used as a portable single seat stool. Rectangular barrel design large area of side wall increased buoyancy. Concave side design enhance barrel wall strength, can make rectangular chairs.

PRESSURIZED ACCUMULATOR TANK

SEAFLO

A S C Accessories Spares
Centre (Pty) Ltd

- Smoother flow, quieter water systems
- Internal rubber membrane eliminates maintenance and allows universal mounting.
- Better control of hot water temperatures
- Simply fitted to new or existing systems
- Longer pump life, lower battery drain
- Snap-in port fittings
- Air Fill Valve: Standard Automotive Style Tire Valve



INTERNAL VOLUME	PRE-CHARGE PRESSURE	MAX OPERATING PRESSURE
1.0 L/33.8 OZ	10 PSI/0.7 BAR	125 PSI/8.6 BAR

MARINE MACERATOR PUMP 01 SERIES

- Completely new design
- Sealed motor
- Easy reach knob in case of clogs
- Run Dry for short periods of time
- New 4-blade design
- Thermally Protected
- Ignition Protected

VOLATAGE	OPEN FLOW	PORTS	MAX DRAW
12V	12.0GPH 45.0LPM	1-1/2" MNPT 1" Hose Barb	12.0 A



WATER PRESSURE SYSTEM 51 SERIES

- Ultra quiet with constant and steady flow
- Superior self-priming capabilities
- Powerful enough to supply up to 5 fixtures
- Built-in adjustable pressure switch
- Easy pre-assembled installation
- Heavy-duty, corrosion resistant motor
- Capable of being run dry without damage
- Can be fitted to new or existing systems

TANK VOLUME	FLOW RATE	VOLTAGE	MAX DRAW	PRESSURE ON	PRESSURE OFF
1.0L	5.5GPH 20.8LPM	24V	9.0A	20PSI/1.4BAR	60PSI/4.2BAR



DC DIAPHRAGM PUMP

A S C

 Accessories Spares
Centre (Pty) Ltd

SEAFLO


HPWP15

HPWP20

HPWP20-24V

- Precise pressure control and stable performance
- Good sealing performance, waterproof and dustproof
- Low starting pressure, reduces cycling
- Good heat dissipation
- Longer pump life
- Can supply up to 4 fixtures
- Run dry capable for normal workloads
- Very quiet operation
- Fresh water or salt water available
- 16 AWG, 9"(22.8 cm) long leads
- Meets or exceeds RoHS, SGS, and ISO standards

MODEL	FLOW RATE	VOLTAGE	CURRENT	FUSE	SHUT-OFF PRESSURE
HPWP15	4.0GPH 15.0LPM	12V	7.0A	11.0A	60PSI / 4.2BAR
HPWP20	5.5GPH 20.0LPM	12V	8.0A	17.0A	60PSI / 4.2BAR
HPWP20-24	7.0GPH 26.5LPM	24V	10.0A	13.0A	60PSI / 4.1BAR

WASHDOWN PUMP KITS

WPK20-HK

WPK20-H

WPK20-HF

WPK20

WPK20-24V


- Built-in check valve
- Spray gun range 10 m/32.81 feet
- Intermittent duty
- Self-priming up to 1.83 m/6 feet
- Dry run capability
- Anticorrosive stoving varnish coated motor
- The best choice for cleaning boats, fish boxes, anchor wells, dinghies, and other similar applications

MODEL	FLOW RATE	VOLTAGE	CURRENT	FUSE	SHUT-OFF PRESSURE
WPK20	5.0GPH 18.9LPM	12V	8.0A	17.0A	70PSI / 4.8BAR
WPK20-24V	5.5GPH 20.8LPM	24V	4.0A	9.0A	70PSI / 4.8BAR

PORTABLE WASHDOWN PUMP KIT

SFWP1-045-070-41
VOLTAGE FLOW CURRENT

12V 4.5GPM 17.0LPM 17A

SHUT-OFF PRESSURE

70PSI / 4.8BAR

- 6.5M UV-protected Coiled Hose
- 2M Inlet Hose
- Easy to use, store, and carry on
- Adjustable sprayer
- Built-in by pass valve
- Smooth flowing
- Quiet Operation
- 16 AWG, 4.5"(11.4 cm) long Leads



OUTDOOR CAMPING SHOWER

8L

Tube length: 1.3m/4.27ft

- 8L Portable outdoor camping shower
- Safety valve design, self-releasing safety
- Super bowl design for easy filling
- With shoulder strap for carrying
- Thickened base makes the product more stable, not easy to damage
- Multi-functional: outdoor shower, garden watering, vehicle cleaning, fruit washing, etc.

SFOCS1-08-01


BILGE PUMP FLOAT SWITCH

SEAFLO⁹

A S C Accessories Spares
Centre (Pty) Ltd



SF-BPS12

- 20A Max.
- Ideal flow sensor for bilge pumps.
- Heavy duty flow switch is designed for the toughest applications.
- Turns pump on when water level reaches 2.0" (51 mm).

MAX AMPS 12VOLTS	MAX AMPS 24VOLTS	WIRE LENGTH	WIRE GAUGE SIZE
20A	10A	8A	18AWG

600GPH SEAFLO BILGE PUMP



SF600S

12V
VOLTAGE

3A
CURRENT

- Pump and switch are stand alone products
- Traditional operation by switch or float switch
- Compact, efficient, long life motors, quiet and vibration-less operation
- CE, RoHS, meets ISO 8846 and ISO 8849 standards
- Easy clean snap-lock strainer bases
- Completely submersible
- Marine grade blocked wiring

FLOW RATE	MAX DRAW	HOSE SIZE	WIRE LEAD
5.0 A	5.0 A	3/4" (19mm)	18AWG 3' (1 m)

NON-AUTOMATIC
BILGE PUMPS 01 SERIES

ASC Accessories Spares
Centre (Pty) Ltd



MODEL	FLOW RATE	VOLTAGE	CURRENT	FUSE	WIRE LEAD
SF350	350GPH	12V	1.0A	2.0A	1m /3.0'
SF500	500GPH	12V	1.6A	4.0A	1m /3.0'
SF750	750GPH	12V	2.5A	5.0A	1m /3.0'
SF1100	1100GPH	12V	3.0A	6.0A	1m /3.0'
SF1500	1500GPH	12V	8.0A	12.0A	1m /3.0'
SF2000	2000GPH	12V	8.5A	14.0 A	1m /3.0'
SF3000	3000GPH	12V	14.0 A	16.0 A	1m /3.0'
SF3500	3500GPH	12V	16.0 A	25.0 A	1m /3.0'

- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Pump and switch are stand alone products
- Entirely Submersible
- Snap-off strainer base for easy maintenance
- Sealed efficient, long life motors, quiet operation
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring
- 18 AWG, 1 m long leads

SEAFLO 12V Electric Marine Submersible non-automatic bilge pumps offer water evacuation activated by a panel or float switch. Include Anti-Airlock protection and exclusive moisture tight seals,marine grade blockd wiring.Our larger impeller design and more robust motor allow us to outperform our competitors. Our removable strainer base fits industry standard mounting conventions though, so you'll have no problem changing to us from them.

NON-AUTOMATIC BILGE PUMPS 13A SERIES



MODEL	FLOW RATE	VOLTAGE	CURRENT	FUSE	WIRE LEAD
SF-G600	500GPH	12V	2.5A	4.0A	3'(1m)
SF-G800	750GPH	12V	3.5A	6.0A	3'(1m)
SF-G1100	1100GPH	12V	4.0A	8.0A	3'(1m)
SF-G1500	1500GPH	12V	4.5A	8.0A	3'(1m)
SF-G2000	2000GPH	12V	7.5A	15.0 A	3'(1m)

- CE, RoHS, ISO 8846, ISO8849 standards
- Includes check valve to prevent water back flow
- Include removable discharge straight fitting
- Drain threaded hose adapters for easy installation
- Submersible and ignition protected
- High efficiency, low amp motor, quiet operation
- Stainless-steel motor shaft
- Anti-Airlock protection
- Motor can be sold separately
- Exclusive moisture tight seals
- Non-automatic - used with a panel switch or SEAFLO float switch
- Threaded Discharge — easier installation, easier maintenance
- Marine grade silicon blocked, tin coated wiring

SEAFLO 12V Electric Marine Submersible non-automatic 600GPH,800GPH,1100GPH bilge pumps offer water evacuation activated by a panel or float switch. Include Anti-Airlock protection and exclusive moisture tight seals, marine grade blocked wiring. Pumps offer a choice of straight or 90 degree ports to suit your installation. Our larger impeller design and more robust motor allow us to outperform our competitors. New innovative split quick-connect joint design removes and installs in seconds! Change pump never been so easy. No need to disconnect base or plumbing when replacing pump, which can meet the needs of most users. Just replace the motor that is all.

AUTOMATIC BILGE PUMPS 17 SERIES

SFBP1-G800-17

SFBP1-G1200-17

SFBP1-G1500-17

SFBP1-G2000-17


MODEL	FLOW RATE	VOLTAGE & CURRENT	FUSE	OUTLET DIAMETER	TEMPERATURE LIMIT	DUTY CYCLE
SFBP1-G800-17	800 GPH	12V, 3.0A	6.0A	3/4"(19mm) and 1-1/8"(29mm)	110°F (43°C) Max	Intermittent
SFBP1-G1200-17	1200 GPH	12V, 4.0A	8.0A	3/4"(19mm) and 1-1/8"(29mm)	110°F (43°C) Max	Intermittent
SFBP1-G1500-17	1500 GPH	12V, 7.0A	14.0A	1-1/8"(29mm)	110°F (43°C) Max	Intermittent
SFBP1-G2000-17	2000 GPH	12V, 9.0A	18.0A	1-1/8"(29mm)	110°F (43°C) Max	Intermittent

- All in one pump switch.
- Snap off strainer.
- Automatic drainage.
- Small and compact.
- Long service life.

- Submersible and Ignition protected.
- Water level sensing Technology.
- Pump check button.
- Removable Impeller cover.
- Check valve prevents water backflow.

The SEAFLO bilge pump has been carefully designed to exhaust standing water only. These pumps are not intended for damage control. Bilge pump capacities may not be sufficient to prevent flooding from rapid accumulation of water due to storms, rough weather and/or rapid leaks created by hull damages and/or unsafe navigational conditions.

LOW PROFILE AUTOMATIC BILGE PUMPS

SEAFLO

A S C

 Accessories Spares
Centre (Pty) Ltd

SFBP1-G800-14A
SFBP1-G1100-14A

MODEL	FLOW RATE	VOLTAGE	CURRENT	HEAD	OPERATION
SFBP1-G800-14A	800 GPH	12V	3.2A	3.2m/10.5'	Automatic Water Level Sensor
SFBP1-G1100-14A	1100 GPH	12V	4.2A	4.0m/13'	Automatic Water Level Sensor

- Low narrow design for tight/awkward bilge spaces
- Easy installation - outlet and pump body 360° rotation
- Efficient operation - Very low power consumption
- Low profile strainer - Leaves the bilge almost dry
- Easy to clean- snap fit assembly easy to remove and replace
- Includes check valve to prevent water back-flow
- CE, RoHS, ISO 8846, ISO8849 standards

- Sealed efficient, long life motors, quiet operation
- Exclusive moisture tight seals
- Marine grade silicon blocked, tin coated wiring
- Stainless-steel motor shaft
- Five-blade impeller to ensure high flow rate
- Anti-Airlock protection

Our best drain down levels ever as low as 10mm or 1/3". SEAFLO Narrow, Low profile bilge pump fits deep down in small/awkward bilge spaces where other pumps won't fit. Compact, Horizontal or vertical mounting, with 360 Degree Discharge for easy remove and replace and leaves the bilge almost dry. Port Type 3/4" (19mm), 1" (25mm), 1 1/8" (29mm) Straight Hose barb or 3/4"(19mm) 90° Elbow together with pumps to meet different installation request. Automatic turns on and off when water rise down.

AUTOMATIC
BILGE
PUMP



B5-ABP750



SFBP1-G1100-06

- All-in-one pump & switch (no float switch required)
 - Pump turns on when water level rises & shuts off when water is removed
 - Will not pump oil-straight motor oil that enters the bilge will not turn the pump on
- Snap-off strainer for easy cleaning
 - Anti-fouling impeller
 - 18 AWG

MODEL	FLOW RATE	VOLTS	AMPS	HEAD	WIRE LEAD	OUTLET DIA
B5-ABP750	750 GPH	12V	3.0A	3.0M	1M/3.0"	3/4"(19MM)
SFBP1-G1100-06	1100 GPH	12V	3.0A	4.0M	1M/3.0"	1-1/8"(29MM)

3800GPH GENERAL
PURPOSE PUMP

SFBP1-G3800-01A



- Entirely submersible
- Shock-absorbing reinforced base
- Silent and vibration-free operation
- Rust and corrosion proof
- Anti-Airlock protection
- 110°F (43°C) maximum temperature
- Easy to install and remove for cleaning
- Compact, efficient and long-life motor
- Exclusive moisture seal
- Ignition protection
- Meet or exceed RoHS, SGS and ISO standards

FLOW RATE	VOLTS	CURRENT	HEAD	FUSE SIZE	PORTS
3800GPH	12V	15.5A	5.3m	25A	1-1/2" /38mm

SUBMERSIBLE AND
INLINE PUMP

SEAFLO



- Able to pump 80°C sea water
- Easy installation
- Able to run about 20 minutes
- Intermittent duty
- Portable to carry on

MODEL	FLOW RATE	VOLTS	AMPS	FUSE	HEAD	WIRE LEAD
SMP-03	200GPH	12V	2.6A	4.0A	16.4' (5 m)	3' (1 m)
SMP-01	500GPH	12V	4.5A	7.5A	23' (7 m)	16' (5 m)

SUBMERSIBLE PUMPS



- Pumps up to 18 vertical feet
- 1/2" Outlet
- Ideal for backup battery sump
- Quiet and vibration less operation
- Completely submersible
- 18 AWG, 1 m long Leads
- Operating time for 30 min
- Dry seal with permanently lubrication
- Can made into food grade
- Delivery height up to 6m

- Stable performance.
- Snap-Off Strainer.
- Built in check valve.
- Thermal Overload Protection.
- Two outlets available.
1-1/8"(29mm) & 1-1/4"(32mm).
- Carry Handle.

MODEL	FLOW RATE	VOLTS	AMPS	FUSE	HEAD	WIRE LEAD
SMP-02	4.2GPH	12V	2.6A	4.0A	16.4" (5m)	3" (1m)
SFBP1-G1500-18	1500GPH	12V	8.0A	15.0A	11.5" (3.5m)	-

PORTABLE

LIVE BAIT KIT

10 SERIES

- Aerates from 5 to 30 gallons (19 to 113 liters) of water
- Foam filtration system keeps water sparkling clean
- CE, RoHS, meets ISO 8846 and ISO 8849 standards
- Entirely submersible and Quiet operation
- Snap-off strainer base for easy maintenance and installation
- A fully adjustable spray head increases or reduces flow of water
- The SEAFLO 350 GPH (1325 LPH) pump attaches easily to any non-porous surface
- The kit also includes battery clips for easy attachment to your 12 volt power source
- 6.3"(160 mm) long spray tube, 13.8"(350 mm) hosepipe can be custom cut to fit into any container



MODEL	FLOW RATE	VOLTAGE	CURRENT	FUSE	WIRE LEAD
PLBK01	300GPH	12V	1.0A	2.0A	3" (1m)

PORTABLE LIVEWELL AERATOR KIT



MODEL	FLOW RATE	VOLTS	CURRENT	OUTLETS
SFBP1-G600-13F	600 GPH	12V	2.4A	3/4"(19mm)
SFBP1-G800-13F	800 GPH	12V	3.5A	3/4"(19mm)

- Includes Stainless Steel strainer
- 1m(3.3') Marine grade blocked wiring
- Entirely submersible
- Quiet and vibration-less operation

LIVEWELL/BAITWELL PUMPS 5 SERIES

SEAFLO

A S C Accessories Spares
Centre (Pty) Ltd

B5-LWP350

B5-LWP800


- Robust, easy click-in, replaceable motor
- Built-in through-hull
- Water cooled motor housing
- Flow: 350, 600 & 800gph in 12 volt version

- Marine grade blocked wiring
- Entirely submersible
- Quiet and vibration-less operation
- 18 AWG, 1 m long Leads

MODEL	FLOW RATE	VOLTAGE	CURRENT	FUSE	HEAD	WIRE LEAD
B5-LWP350	350GPH	12V	0.72A	2.0A	3.9' (1.2 m)	3" (1m)
B5-LWP800	800GPH	12V	4.0A	6.0A	4.0m/13.0'	3" (1m)

LIVEWELL/BAITWELL PUMPS 13C SERIES

- Discharge nozzle can be rotated 360 degrees for optimal installation
- Pump housing can rotate 360 degrees to allow positioning of the discharge outlet
- Dual port fitting for optional washdown pump
- Includes removable discharge straight and elbow fittings
- Quick one hand "push button" motor cartridge removal system
- CE, RoHS, ISO 8846, ISO 8849 standards
- Anti-Airlock protection


SF-LBP-800
SF-LBP-1100

MODEL	FLOW RATE	VOLTAGE	CURRENT	FUSE	HEAD	WIRE LEAD
SF-LBP-800	800GPH	12V	3.5A	6.0A	3.0m/9.0'	3" (1m)
SF-LBP-1100	1100GPH	12V	4.0A	8.0A	4.0m/12.0'	3" (1m)

1600GPH DUAL PORT LIVEWELL PUMP



SFBP1-G1600-01A

- Silent and vibration-free operation.
- Dual port base design for easy customer selection.
- Exclusive moisture seal.
- Ignition protection.
- Stainless steel shaft.
- 110°F (43°C) maximum temperature.
- 1600 GPH (6054 LPH) dual port
- Anti-airlock feature, heavy-duty long-life motor.
- Entirely submersible.
- Easy to install and remove for cleaning.
- Can be easily installed into any valve fitting with 1" NPT male thread.

FLOW RATE	VOLTS	CURRENT	HEAD	INLETS	OUTLETS
1600 GHP	12V	8.4A	4.2m	1"NPT 31mm	1-1/8" and 1/2 "NPT



GEAR OIL LUBE PUMP

SFOCS-008-3

PER PUMP STROKE	ADAPTER SIZE	HOSE LENGTH
8cc	8mm	18"(460mm)



- Fits standard quart bottles with 28mm bottle cap
- Long and short suction tubes for tall and short quart bottles
- 8cc stable current per stroke, 18" clear flexible hose for pumping liquids into tight places
- 3/8"-16 adapter Fits for all Mercury and Mariner Outboard Motors and other American made outboards
- 8mm aluminum adapter fits for Yamaha, Nissan, Tohatsu, Honda and Johnson Evinrude outboards

The quart pump fits standard quart bottles with 28mm caps and comes with long and short suction tubes to accommodate both tall and short bottles. Each stroke delivers a consistent 8cc flow rate, while the 18-inch clear flexible hose allows easy pumping into hard-to-reach areas. The pump includes two interchangeable adapters: a 3/8"-16 thread adapter compatible with Mercury and Mariner outboards, and an 8mm aluminum adapter suitable for Yamaha, Nissan, Tohatsu, Honda, and Johnson Evinrude outboards. Built for durability and convenience, this oil transfer pump is perfect for marine, automotive, and small-engine service applications.

MANUAL DIAPHRAGM HAND PUMP

B5-HBP720



- Ease of operation - molded grip handle
- Easy maintenance - easy remove diaphragm
- Secure fit - robust molded base
- Compact design - ideal for confined spaces
- Reliable performance - U-shaped outlet valve
- Efficient performance - up to 5.3 Gallons Per Minute

HOSE CONNECTIONS	WEIGHT	FLOW RATE
1.36" (34.5 mm)	0.99 lbs (0.45 kg)	5.3GPH

- Proven design - tough yet lightweight polypropylene materials
- Versatility of installation
- Simple plumbing- 1-1/4" (34 mm) smooth hose connection

For mounting on bulkhead or deck. This is a good manual bilge pump for small to medium-sized boats. Lightweight and sturdy, its easy lever action allows fast pumping. Easy to use and maintain, the diaphragm is quickly accessed for removing debris.

FUEL TRANSFER PUMP



SFFTP5-024-02

AA-Batteries



SFFTP5-032-02

Lithium Battery

Rechargeable

MODEL	POWER TYPE	VOLTAGE	FLOW RATE	MAX HEAD	OPERATION TIME
SFFTP5-024-02	AA-Batteries	3V	9.0LPM	1.5m	1Hour
SFFTP5-032-02	lithium batery	3.7V	12.0LPM	3m	2Hours

The SEAFLO fuel transfer pump is designed to eliminate the need for lifting heavy fuel cans, making refueling easier and convenient. There are two versions of fuel transfer pumps. There are AA-battery version and lithium battery version. SEAFLO fuel transfer pump is widely used for Water (not for drinking water), Gasoline, Diesel, Antifreeze, Light Oil, Soaps, Chemical insecticides, Detergent, Deodorants, Mild Acids, Wax, etc.

IN-LINE BILGE BLOWER FAN



SFIB1-145-03



SFIB1-130-01

- Meets or exceeds ISO 8846 certification
- Built-in mounting feet allows easy vertical or horizontal installation
- Very low current draw, high volume air flow, long life
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing

MODEL	VOLTAGE	AIR FLOW	CURRENT	FUSE	INTAKE DIA
SFIB1-145-03	12V	145/247	3.0A	5.0A	3"/76 mm
SFIB1-130-01	12V	130/220	2.5A	5.0A	3"/76 mm

ROUND LOUVER AIR VENT



SFAV1-01



SFAV2-01

MODEL	COLOR	MATERIAL	SIZE
SFAV1-01	White	ABS	3.077" (Ø77.8mm)
SFAV2-01	Black	ABS	3.077" (Ø77.8mm)

- 69.5 mm Ducting Fitting Size
- High-Quality ABS Plastic
- Simple To Fit
- Designed To Cover Wall Or Ceiling Openings And Ducting Vents

ALL-ROUND POLE LIGHTS

SEAFLO

A S C

 Accessories Spares
Centre (Pty) Ltd

SFNL081-9-02B
SFNL081-25-02B
SFNL083-24-03B
SFNL083-36-03B
SFNL083-9-04B
SFNL083-24-04B
SFNL083-41-04B

MODEL	VOLTAGE & POWER	VISIBILITY	PROTECTION GLASS	BASE TYPE	COLOR TEMPERATURE	MATERIAL
SFNL081-9-02B	12V 2W	2NM	IP65	Adjustable Mount	4000-4500K	Plastic And Stainless Steel
SFNL081-25-02B	12V 2W	2NM	IP65	Adjustable Mount	4000-4500K	Plastic And Stainless Steel
SFNL083-24-03B	12-24V 2.5W	3NM	IP65	Plug-in mount	4000-4500K	Plastic And Stainless Steel
SFNL083-36-03B	12-24V 2.5W	3NM	IP65	Plug-in mount	4000-4500K	Plastic And Stainless Steel
SFNL083-9-04B	10-30V 1W	2NM	IP65	Adjustable Mount	4000-4500K	Plastic And Stainless Steel
SFNL083-24-04B	10-30V 1W	2NM	IP65	Adjustable Mount	4000-4500K	Plastic And Stainless Steel
SFNL083-41-04B	10-30V 1W	2NM	IP65	Plug-in mount	4000-4500K	Plastic And Aluminum

Suitable Mounting Bases for
Plug-in Mount Pole Lights


SFPB-01: Straight base, 68x50x80mm

SFPB-02: Angled base, 68x50x86mm

SFPB-03: Angled base, 97x41x65mm

SFPB-01
SFPB-02
SFPB-03


MINI LED NAVIGATION LIGHTS



MODEL	NAME	LEVEL ARC	COLOR	FUNCTION	SIZE
SFNL011-RW-01	Starboard light	112.5°	Green	Starboard side signal light	64.5*43*35.5mm
SFNL011-LW-01	Port light	112.5°	Red	Port side signal light	64.5*43*35.5mm
SFNL011-MW-01	Masthead light	225°	White	Ship roof signal light	64.5*43*35.5mm
SFNL011-RB-01	Starboard light	112.5°	Green	Starboard side signal light	64.5*43*35.5mm
SFNL011-LB-01	Port light	112.5°	Red	Port side signal light	64.5*43*35.5mm


- Simple installation, no need for complicated tools, convenient use .
- Made of high-quality PC material, impact resistant and seawater corrosion resistant .
- High brightness, strong penetration, which greatly improves the safety of navigation .
- Advanced manufacturing, long duration and low energy consumption .
- Super lightweight and convenient .
- Suitable for most yachts, fishing boats, speed boats and other vessels .

SEAFLO boat navigation light adopt advanced LED technology, which is energy-saving, low power consumption and long service life, improving the safety of night navigation. It is suitable for ships with a length of less than 20 meters for night navigation light signal communication purposes.

SQUARE LED NAVIGATION LIGHT

SEAFLO

A S C

 Accessories Spares
Centre (Pty) Ltd

SFNL011-PW-02


2PCS SET


SFNL011-PB-02


2PCS SET


SFNL011-MW-02


MODEL	NAME	LEVEL ARC	COLOR	FUNCTION	SIZE
SFNL011-PW-02	White Starboard light & Port Light	112.5°	Green & Red	Starboard & Port signal lights	78.9*66.5*58.8mm
SFNL011-PB-02	Black Starboard light & Port Light	112.5°	Green & Red	Starboard & Port signal lights	78.9*66.5*58.8mm
SFNL011-MW-02	Masthead light	225°	White	Ship roof signal light	78.9*66.5*58.8mm


- Simple installation, no complicated tools required, easy to use •
- Made of high-quality materials, impact resistant and resistant to seawater corrosion •
- High brightness, strong penetration, which greatly improves the safety of navigation •
 - Advanced manufacturing, long duration and low energy consumption •
 - Super lightweight and convenient •
- Suitable for most yachts, fishing boats, speed boats and other vessels •

SEAFLO boat navigation light adopt advanced LED technology, which is energy-saving, low power consumption and long service life, improving the safety of night navigation. It is suitable for ships with a length of less than 20 meters for night navigation light signal communication purposes.

LED BI-COLOR BOW NAVIGATION LIGHT

SFNL051-01S


SFNL053-01S



MODEL	VOLTAGE	VISIBILITY	POWER	MATERIAL	SIZE
SFNL051-01S	12V	1NM	0.7W	Chrome-plated zinc	101*79*45mm
SFNL053-01S	10-30V	2NM	2W	Stainless Steel 316	101*79*45mm

- Simple installation, no complicated tools required, easy to use •
- High brightness, strong penetration, which greatly improves the safety of navigation •
- Made of high-quality materials, light and convenient, impact-resistant, and resistant to seawater corrosion •
- High-quality LED lights, long service life, low energy consumption •
- Suitable for most yachts, fishing boats, speedboats and other ships •

LED DECK MOUNT NAVIGATION LIGHTS

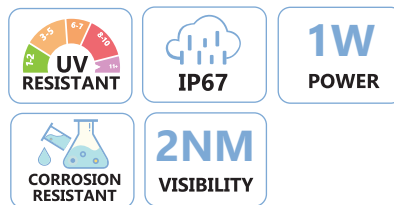

SFNL021-PS-01

SFNL031-BS-01



MODEL	NAME	VOLTAGE	ANGLE	SIZE
SFNL021-PS-01	Vertical Mount Port and Starboard light	12V	112.5°	60*54*27mm
SFNL031-BS-01	Horizontal Mount Bi-Color light	12V	225°	60*54*27mm

- 316 stainless steel housing, impact resistant and seawater corrosion resistant •
- For boats up to 65.6 ft.(20m) •
- LED lighting element stays cool to the touch, low energy consumption, and long lifespan •
- High brightness, strong penetration, which greatly improves the safety of navigation •
- Simple installation, no complicated tools required, easy to use •
- Super lightweight and convenient •

LED DECK LIGHT

SFDL1-WA-01

VOLTS
COLOR
MATERIAL
SIZE

14V

White
(5500-6300K)

Aluminum

108.5*86.2*20mm

SEAFLO

LED LIVEWELL LIGHT

SFCL1-BB-05

12V
VOLTAGE

0.2W
POWER

**MOUNT
TYPE**
COLOR
MATERIAL
SIZE

Flush Mount

Blue

PC

M20*1.5*33 mm
33*33mm

REMOTE CONTROL LED SEARCHLIGHT

Beam Distance : 300-400m



Resistant

50000H
LED lifespan

Low Noise

One-key
Reset

ASA
Material

SFSL-2700W-01W

VOLTAGE
POWER
BRIGHTNESS
HOUSING COLOUR
TEMPERATURE
WATERPROOF
ROTATION

10-30V

28W

2700Lumens

White

White 5500K

IP65

Up & Down: 60° rotation.
Left & Right: 360° rotation.

**LED OBLONG
COURTESY LIGHT**

SFCL3-WS-01



UV
RESISTANT

IP67

CORROSION
RESISTANT

12-24V
VOLTAGE

0.5W
POWER

COLOR	MATERIALS	MOUNT TYPE	SIZE
Cool White (5500-6300K)	Stainless Steel 316 and PC base	Flush Mount	32*74.8*20.2mm

**LED CEILING
LIGHT**

SFCL1-3-WW-01



UV
RESISTANT

IP67

CORROSION

12V
VOLTAGE

1W
POWER

COLOR	MATERIALS	MOUNT TYPE	SIZE
Cool White	PC	Flush Mount	Ø77mm

**COVERED
BATTERY
CUTOFF
SWITCH
WITH KEY**

SFBIS1-01



VOLTS	AMPS	MAX AMP DRAW	WORKING TEMPERATURE
50V	275A	1250A	-40~80°C

- An interchangeable labeling system allowing a full range of applications
- ABS Anti-aging, Anti-ultraviolet
- May be connected to either the positive or the negative electric cable
- In the "OFF" position the key may be removed. (SFIBS1-01 only)
- Small in size, Fine appearance, Sturdy and durable

PLASTIC HANDLE

SFFP2-03



MOUNTING HOLE DIAMETER	FACE PLATE DIAMETER	LOCK	COLOR
1-3/4"	2-1/4"x2-1/4"	NO	BLACK

Marine grade, with strong corrosion resistance, highly polished surface. Marine hatch cover handle, flat push elevator, pull ring handle, cupboard and storage cabinet handle.

FLUSH LATCH



SFFP2-02

- Marine grade, with strong corrosion resistance, highly polished surface.
- Marine hatch cover handle, flat push elevator, pull ring handle, cupboard and storage cabinet handle.

MOUNTING HOLE DIAMETER	MOUNTING SURFACE	FACE PLATE DIAMETER	LOCK
2"(5cm)	1/12" to 1/2" 0.2-1.3cm	2-4/11" (6cm)	NO

FLUSH PULL SLAM LATCH



SFSL-03

- Marine AISI 316 stainless steel
- Fits standard 2-Inch hole cutout.
- Surface polished, corrosion resistance and durability

CUT-OUT	DIAMETER	DECK THICKNESS
1.97"	2.42"(62mm)	0.28"-0.59"

FLUSH LATCH LOCKING



SFFL1-01



SFFL2-01

MODEL	MOUNTING HOLE DIAMETER	MOUNTING SURFACE	FACE PLATE DIAMETER	LOCK	COLOR
SFFL1-01	2-1/2" (6.3cm)	3/8" to 7/8"(0.9cm-2.2cm)	2-9/10" (7.4cm)	Yes	White
SFFL2-01	2-1/2" (6.3cm)	3/8" to 7/8"(0.9cm-2.2cm)	2-9/10" (7.4cm)	Yes	Black

- Marine grade, with strong corrosion resistance, highly polished surface.
- Marine hatch cover handle, flat push elevator, pull ring handle, cupboard and storage cabinet handle.

FOLD-UP ADJUSTABLE DRINK HOLDER



SFTS1-01

- Mounts with tapes or screws
- Folds up for compact storage
- Suitable for RVs, cars, trucks ,boats, etc.
- Easily adjust to hold almost any size bottle, can or mug

BAIT/FILLET TABLE





SFBCB-01

- Multi-functional storage
- Easy to disassemble design
- Enhanced practicality
- Hook hole on the left side
- Drainage holes for efficient water drainage
- One-piece molded polypropylene material
- Incorporate placement holes for fish grippers and knife slots

SIZE	COLOR	MATERIAL
98.3*95*97.7mm	White	ABS

MATERIAL	NET WEIGHT	COLOR	SIZE
PP, GF & Aluminum	2342g	White	460x373x486

NYLON CLEATS

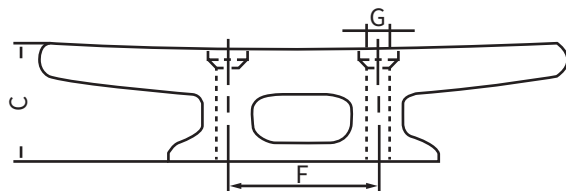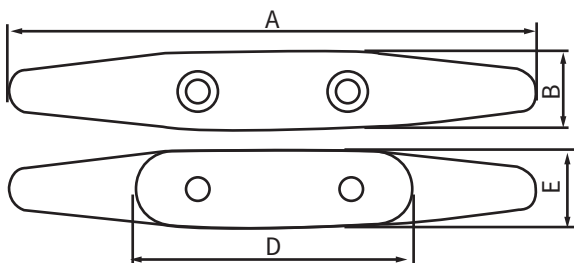

SFNC-01

SFNC-02

SFNC-03

SFNC-04

SFNC-05





MODEL	SIZE	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
SFNC-01	3"	76	13	21	47	13	28	Φ4.5
SFNC-02	4"	101	16	25	50	16	30	Φ4.5
SFNC-03	5"	127	19	28	65	18.5	36	Φ5.5
SFNC-04	6"	152	23	36	73	23	42	Φ6.8
SFNC-05	8"	203	26.5	43	100	26	49	Φ6.8

STAINLESS STEELS CLEAT

SEAFLO

A S C Accessories Spares
Centre (Pty) Ltd

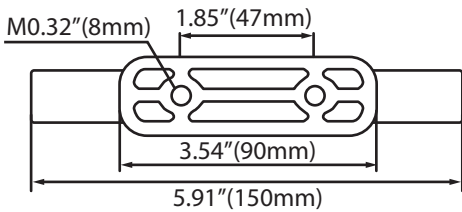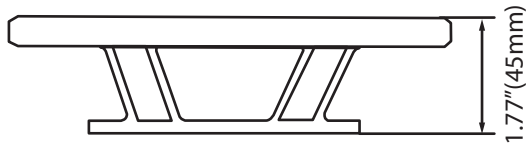

SFSC-006-03



- Easy installation
- Cast Construction, Strongly Built.
- Corrosion and Moisture Resistant.

MODEL	LENGTH	HEIGHT	BASE SIZE	WEIGHT	MATERIAL
SFSC-006-03	6"	1.77"	3.54"(90mm)	211g	316SS

MARINE EQUIPMENT
PRODUCTS
SPEAKS FOR ITSELF



Seaflo is a globally trusted marine and RV systems brand known for delivering professional, cost-effective, and reliable water system solutions backed by more than a decade of industry experience. With ISO9001-certified manufacturing, modern production facilities, and a diverse product range spanning pumps, switches, blowers, portholes, and more, Seaflo is deeply established in the marine, RV, industrial, and agricultural markets. Engineered for durability and performance, offering robust construction, innovative design, and dependable service—making it a preferred choice for recreational users seeking long-lasting quality.



SEAFLO

SCAN THE QR CODE
TO DOWNLOAD OUR
DIGITAL CATALOGUE



**Accessories Spares
Centre (Pty) Ltd**

Suppliers of Alternative Parts and Accessories to the Motor, Hardware and Marine Trade.



031 581 8400



info@accessoriesspares.co.za



www.accessoriesspares.co.za



17 Travertine Crescent, Briardene 4051
Durban, KZN, South Africa.
PO Box 1107, Hyper By The Sea, 4053